
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

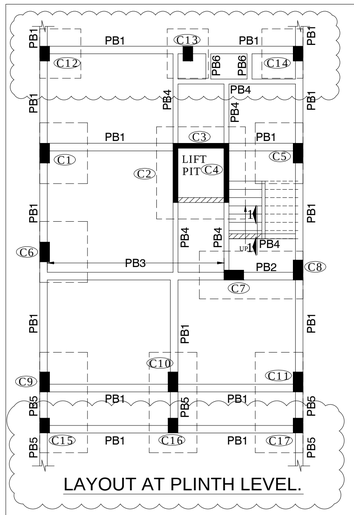


LAYOUT AT PLINTH LEVEL.

SCHEDULE OF COLUMN & FOOTING.


THIRD FLOOR LVL TO TERRACE FLOOR LVL.	COLUMN SIZE	230 X 600	150 X 1800	150 X 1400	230 X 600	230 X 600	230 X 450	230 X 450
	MAIN REINF.	6 - ℸ 16	26 - ℸ 10	20 - ℸ 10	6 - ℸ 16	6 - ℸ 16	6 - ℸ 16	6 - ℸ 16
	LINKS	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c
SECOND FLOOR LVL. TO THIRD FLOOR LVL.	COLUMN SIZE	230 X 600	150 X 1800	150 X 1400	230 X 600	230 X 600	230 X 450	230 X 450
	MAIN REINF.	6 - ℸ 16	26 - ℸ 10	20 - ℸ 10	6 - ℸ 16	6 - ℸ 16	6 - ℸ 16	6 - ℸ 16
	LINKS	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c
FIRST FLOOR LVL TO SECOND FLOOR LVL.	COLUMN SIZE	230 X 600	150 X 1800	150 X 1400	230 X 600	230 X 600	230 X 450	230 X 450
	MAIN REINF.	6 - ℸ 16	26 - ℸ 10	20 - ℸ 10	6 - ℸ 16	6 - ℸ 16	6 - ℸ 16	6 - ℸ 16
	LINKS	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c
PLINTH LVL TOP TO FIRST FLOOR LVL.	COLUMN SIZE	300 X 600	150 X 1800	150 X 1400	300 X 600	300 X 600	300 X 450	300 X 450
	MAIN REINF.	8 - ℸ 16	26 - ℸ 10	20 - ℸ 10	8 - ℸ 16	8 - ℸ 16	6 - ℸ 16	6 - ℸ 16
	LINKS	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c
FOOTING TO PLINTH LVL.	COLUMN SIZE	300 X 600	150 X 1800	150 X 1400	300 X 600	300 X 600	300 X 450	300 X 450
	MAIN REINF.	8 - ℸ 16	26 - ℸ 10	20 - ℸ 10	8 - ℸ 16	8 - ℸ 16	6 - ℸ 16	6 - ℸ 16
	LINKS	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c	ℸ 8 @ 150 c/c
GR.LVL D R.C.C. FOOTING	FOOTING SIZE	1450X1850	REFER DETAIL		REFER DETAIL	REFER DETAIL		1250X1500
	D	600						500
	LONG SPAN STEEL	ℸ 10 @ 150 c/c T&B						ℸ 10 @ 150 c/c T&B
	SHORT SPAN STEEL	ℸ 10 @ 150 c/c T&B						ℸ 10 @ 150 c/c T&B
COLUMN NOS		C1,C5,C6.	C2,C4.	C3.	C7,C8.	C9,C10,C11.	C15,C16,C17.	C12,C13,C14.

SCHEDULE OF PLINTH BEAMS


BEAM NOS	SIZE	AT BOTTOM		AT TOP			STIRRUPS	REMARKS
		STRAIGHT	CURTAIL	STRAIGHT	EXTRA AT CON.SUPP.	EXTRA AT END.SUPP.		
PB1	230 X 500	2 - ℸ16	---	2 - ℸ 12	1 - ℸ16	---	ℸ8 @ 150 C/C	
PB2	230 X 500	2 - ℸ16	---	2 - ℸ 10	1 - ℸ16	---	ℸ8 @ 170 C/C	
PB3	230 X 500	3 - ℸ16	---	2 - ℸ 12	1 - ℸ16	---	ℸ8 @ 150 C/C	
PB4	150 X 500	2 - ℸ12	---	2 - ℸ 12	---	---	ℸ8 @ 150 C/C	
PB5	230 X 300	2 - ℸ12	---	2 - ℸ 12	---	---	ℸ8 @ 150 C/C	
PB6	150 X 300	2 - ℸ12	---	2 - ℸ 10	---	---	ℸ8 @ 200 C/C	




TYPICAL DETAIL OF STAIRCASE
SECTION 1- 1




DETAILS OF COLUMN NO. C1,C5,C6,C7,C8, C9,C10,C11.




DETAILS OF COLUMN NO. C12,C13,C14,C15, C16,C17.




COMBINED FOOTING DETAIL OF COL. NO. C7,C8.




COMBINED FOOTING DETAIL OF COL. NO. C9,C11,C15,C17.




COMBINED FOOTING DETAIL OF COL. NO. C10,C16.

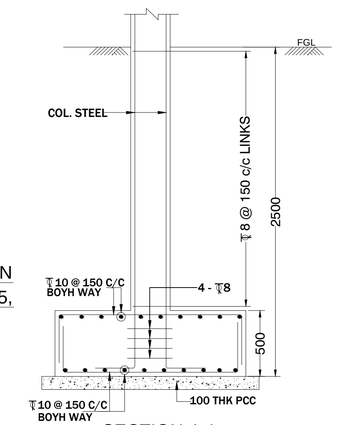


SECTION 4-4

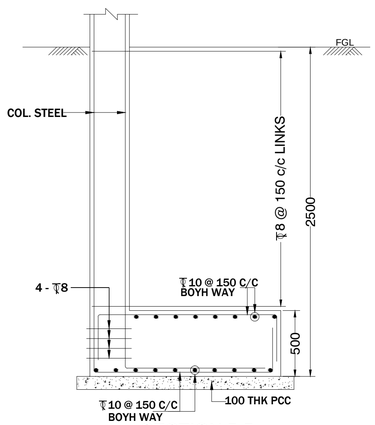


SECTION 5-5

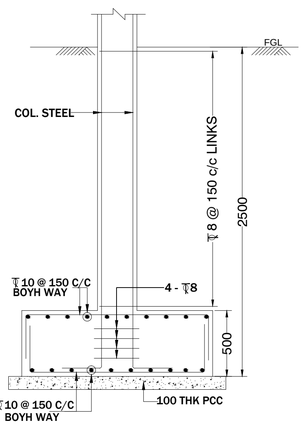


SECTION 6-6

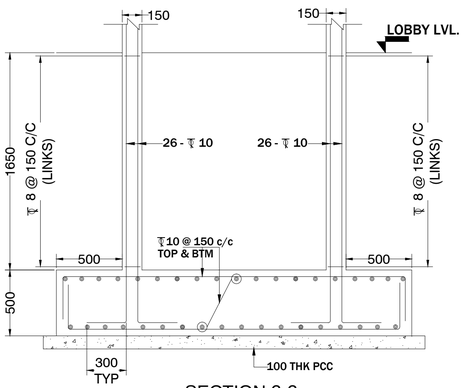


SECTION 2-2

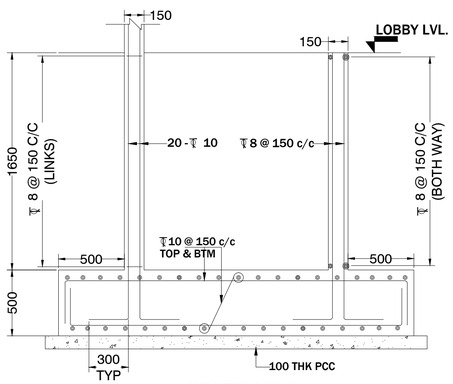


SECTION 3-3



DETAILS OF COLUMN NO. C2,C3,C4.

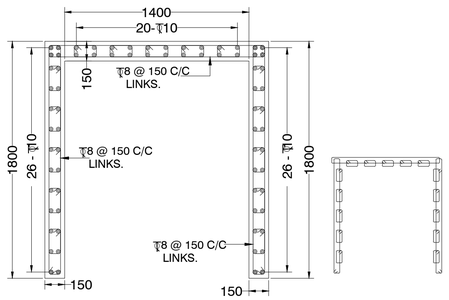

DETAILS OF COLUMN NO. C2,C3,C4.

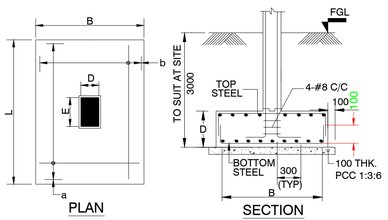


TYP. DETAILS OF FOOTING

NOTES:


1. DO NOT SCALE THIS DRAWING, FOLLOW WRITTEN DIMENSIONS ONLY.
2. ANY OMISSIONS OR DISCREPENCIES TO BE BROUGHT TO OUR NOTICE PRIOR TO ACTUAL EXECUTION OF WORK.
3. MATERIALS :
   a) CEMENT : ORDINARY PORTLAND CEMENT CONFORMING TO IS :12269
   b) REINFORCEMENT : Fe 500 GRADE CONFORMING TO IS : 1786
   c) CONCRETE : M20
4. CLEAR COVER TO MAIN REINFORCEMENT

	TOP	BOTTOM	SIDES
a) RAFT/FOOTING	50	75	50
b) PLINTH BEAM	30	30	30
d) COLUMNS	---	---	40

5. ALL LAPS SHALL BE STAGGERED & NOT MORE THAN 50% BARS TO LAPPED AT ANY ONE SECTION.
   a) SLABS AND BEAMS - 50 X DIA
   b) COLUMNS - 50 X DIA
6. R.C. WORK SHALL CONFORM TO IS: 456:2000
7. THE DRAWING TO BE READ WITH CONCERN ARCH. FLOOR PLAN, SECTIONS AND ELEVATIONS FOR DIMENSIONS.
8. ASSUMED SAFE BEARING CAPACITY OF SOIL IS T/M2 AT A DEPTH OF 2.50M BELOW NGL FOUNDATION TO REST ON THE SOIL HAVING THE SAID BEARING CAPACITY.



TYP. DETAILS OF BEAM

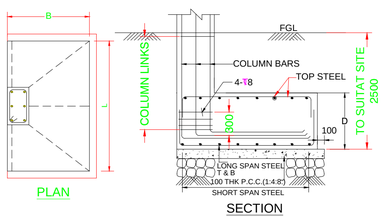

TYP. DETAIL OF ECCENTRIC FOOTING

R1	02.11.2026	REVISED AS PER AFTER QC COLUMNS & RELEASED FOR CONSTRUCTION	RAVI
R0	14.10.2026	ADVANCE COPY	RAVI
REV	DATE	DESCRIPTION	APPROVED

THIS DRAWING AND DESIGN ON WHICH IT IS BASED ARE THE COPYRIGHT AND SOLE PROPERTY OF AGHARKAR CONSULTING ENGINEERS PVT. LTD AND THEIR USER USE IS CONDITIONED UPON THE USER'S AGREEMENT NOT TO BE REPRODUCE OR TO USE FOR ANY OTHER PURPOSE WHOLLY OR IN PART ANY DETAIL THEREIN WITHOUT THE SPECIFIC WRITTEN PERMISSION OF AGHARKAR CONSULTANTS.

AGHARKAR CONSULTING ENGINEERS PVT. LTD
CIVIL ENGINEERING CONSULTANTS.
RAHEJA ARCADE,OFFICE NO.: 04 GROUND FLOOR, PLOT NO - 61, SECTOR - 11, CBD. BELAPUR, NAVI MUMBAI.
212, SHRIPAD APPARTMENT, SADASHIV PETH, PUNE - 411 030.
OFFIC MOBI - 9821843640 / 9820432529 / 022-49617282 agharkar.consultants@gmail.com

CLIENT :-

PROJECT :- PROPOSED RESIDENTIAL BUILDING ON PLOT NO C- 89, SECTOR -12 ,GHARGHAR.

ARCHITECT :- KUNAL DILIP GHATOLE

TITLE :- LAYOUT & RCC DETAILS OF FOUNDATION, COLUMN & PLINTH BEAMS.

DESIGN	RAVI	DRG. NO.	JOB NO.	SIZE	REV.
DRAWN	Rajashree	01	1199/26	A3	R1
CHECKED	VKA				

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT